



ROBORIGGER SMARTSCREEN

The Roborigger Smartscreen system allows the crane operator to interface with Roborigger and its camera. Every Roborigger is already fitted with an IP camera that can capture images and provide a video feed. The European configuration uses standard Wi-Fi, with a directional Wi-Fi antenna mounted on an adjustable bracket beside the rugged tablet in the crane cabin. The antenna connects directly to the tablet and provides the wireless link to Roborigger. Video can be viewed and saved locally on the crane operator's tablet or saved directly on Roborigger itself. The system is designed for simplicity and can be installed in less than a minute. Attach the screen and antenna bracket to the crane windscreen using the suction mounts, connect the directional antenna cable and USB-C power supply, then connect to the Roborigger Wi-Fi network.

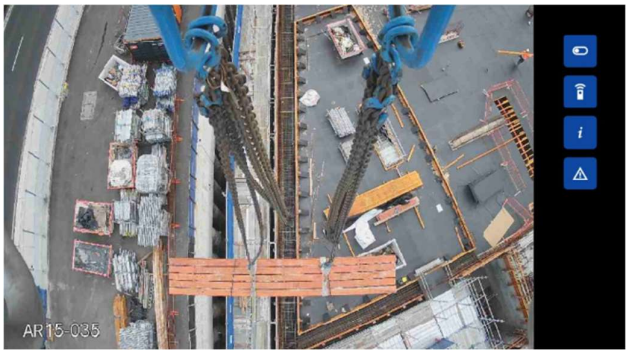

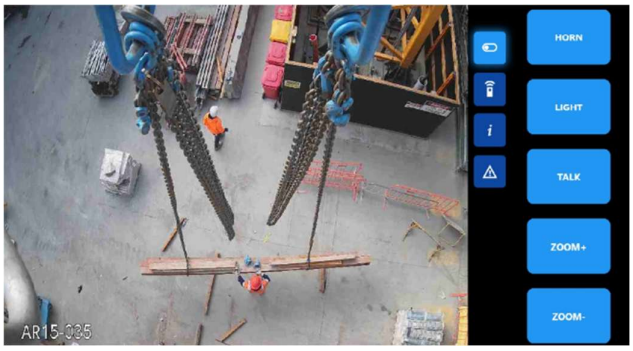


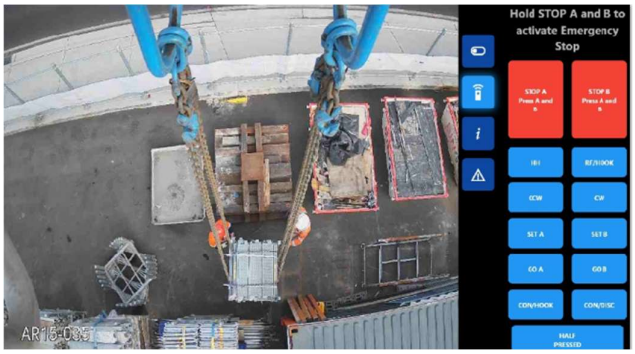

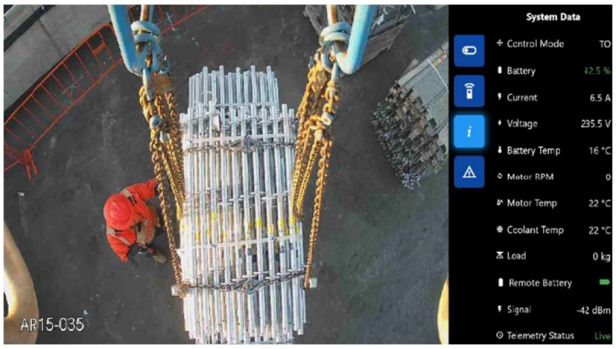

WHY IS IT A SMARTSCREEN?

The touch screen has the ability to sound the horn, turn on the floodlight, transmit voice from the crane operator to the Roborigger speaker, zoom the camera if a zoom camera is fitted and it offers a fully functional remote control for Roborigger that has all the features of the 10 button remote. This includes the ability to preset 2 orientations and then go to these orientations with a single button press. Other screens have system data and any warnings or fault codes from Roborigger.

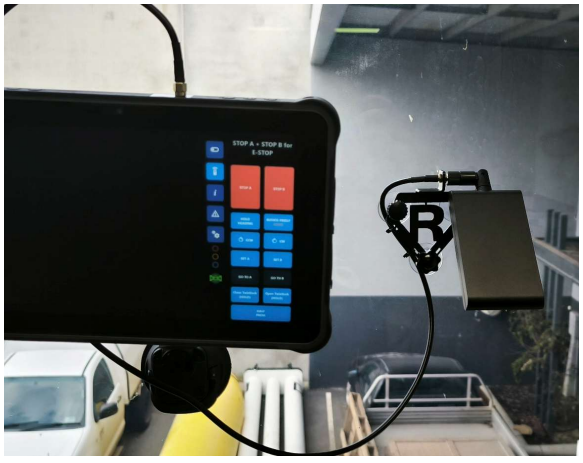



Roborigger International Pty Ltd
Perth Australia
Tel: +61 8 9488 4500
www.roborigger.com.au